




PAXIM10

An Unattended Payment Terminal just for contactless and mobile payments

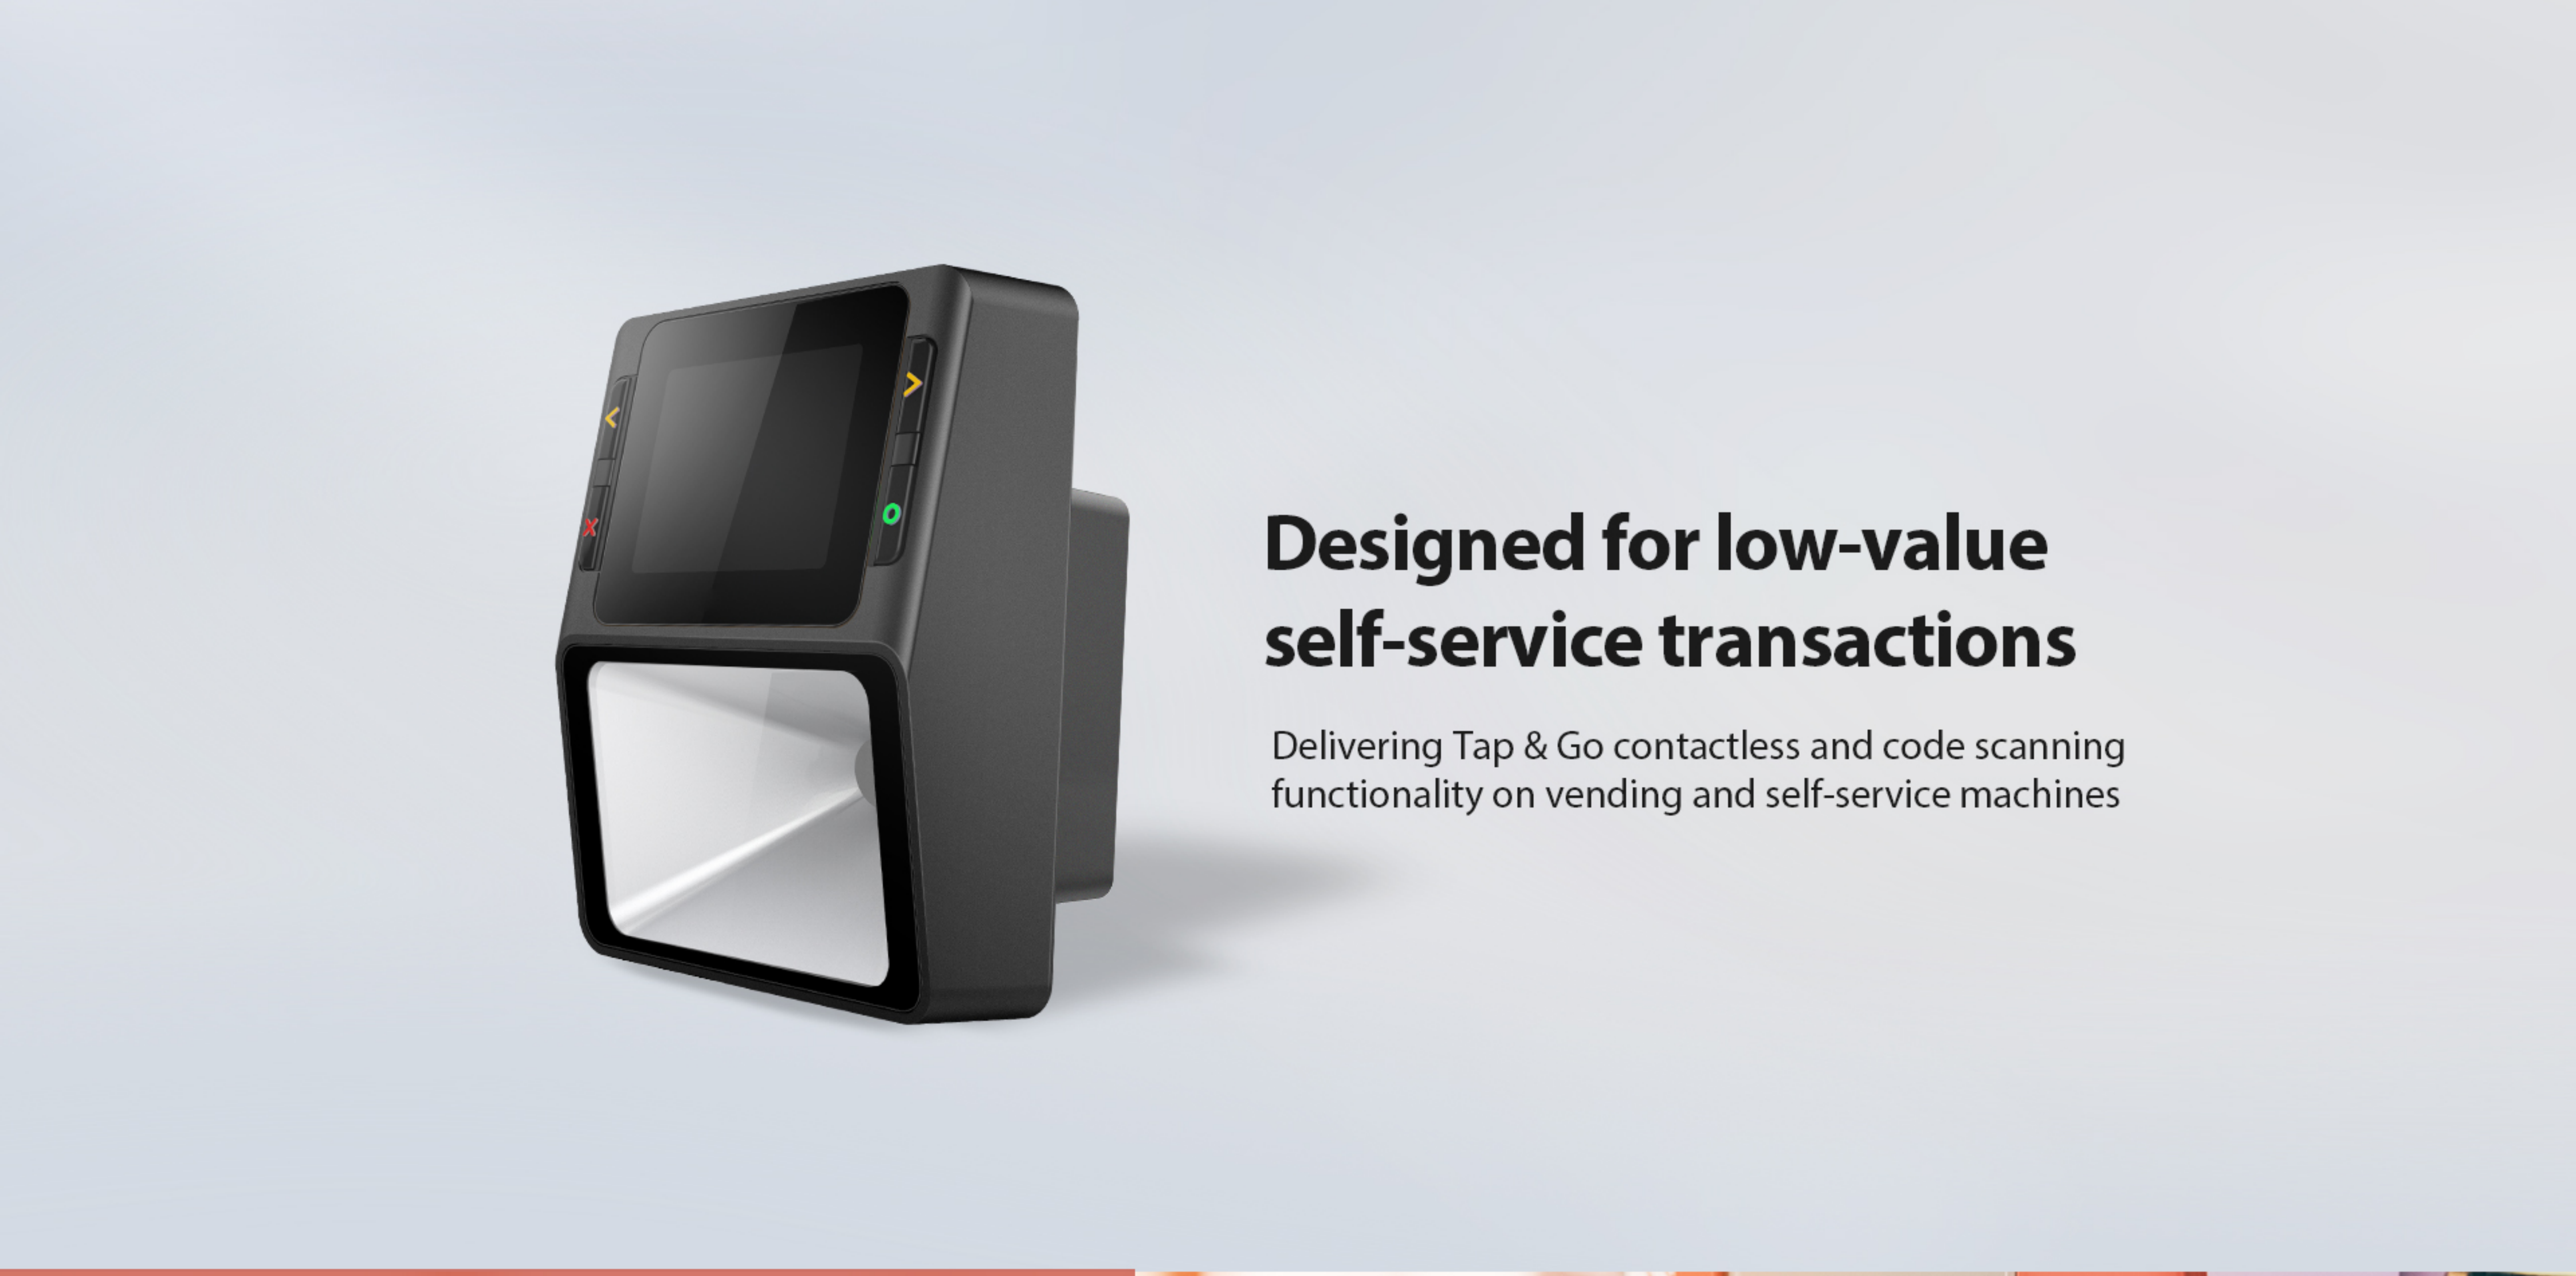


Designed for low-value self-service transactions

Delivering Tap & Go contactless and code scanning functionality on vending and self-service machines



Large scanning footprint

Making it fast and easy to read any type of QR or barcode

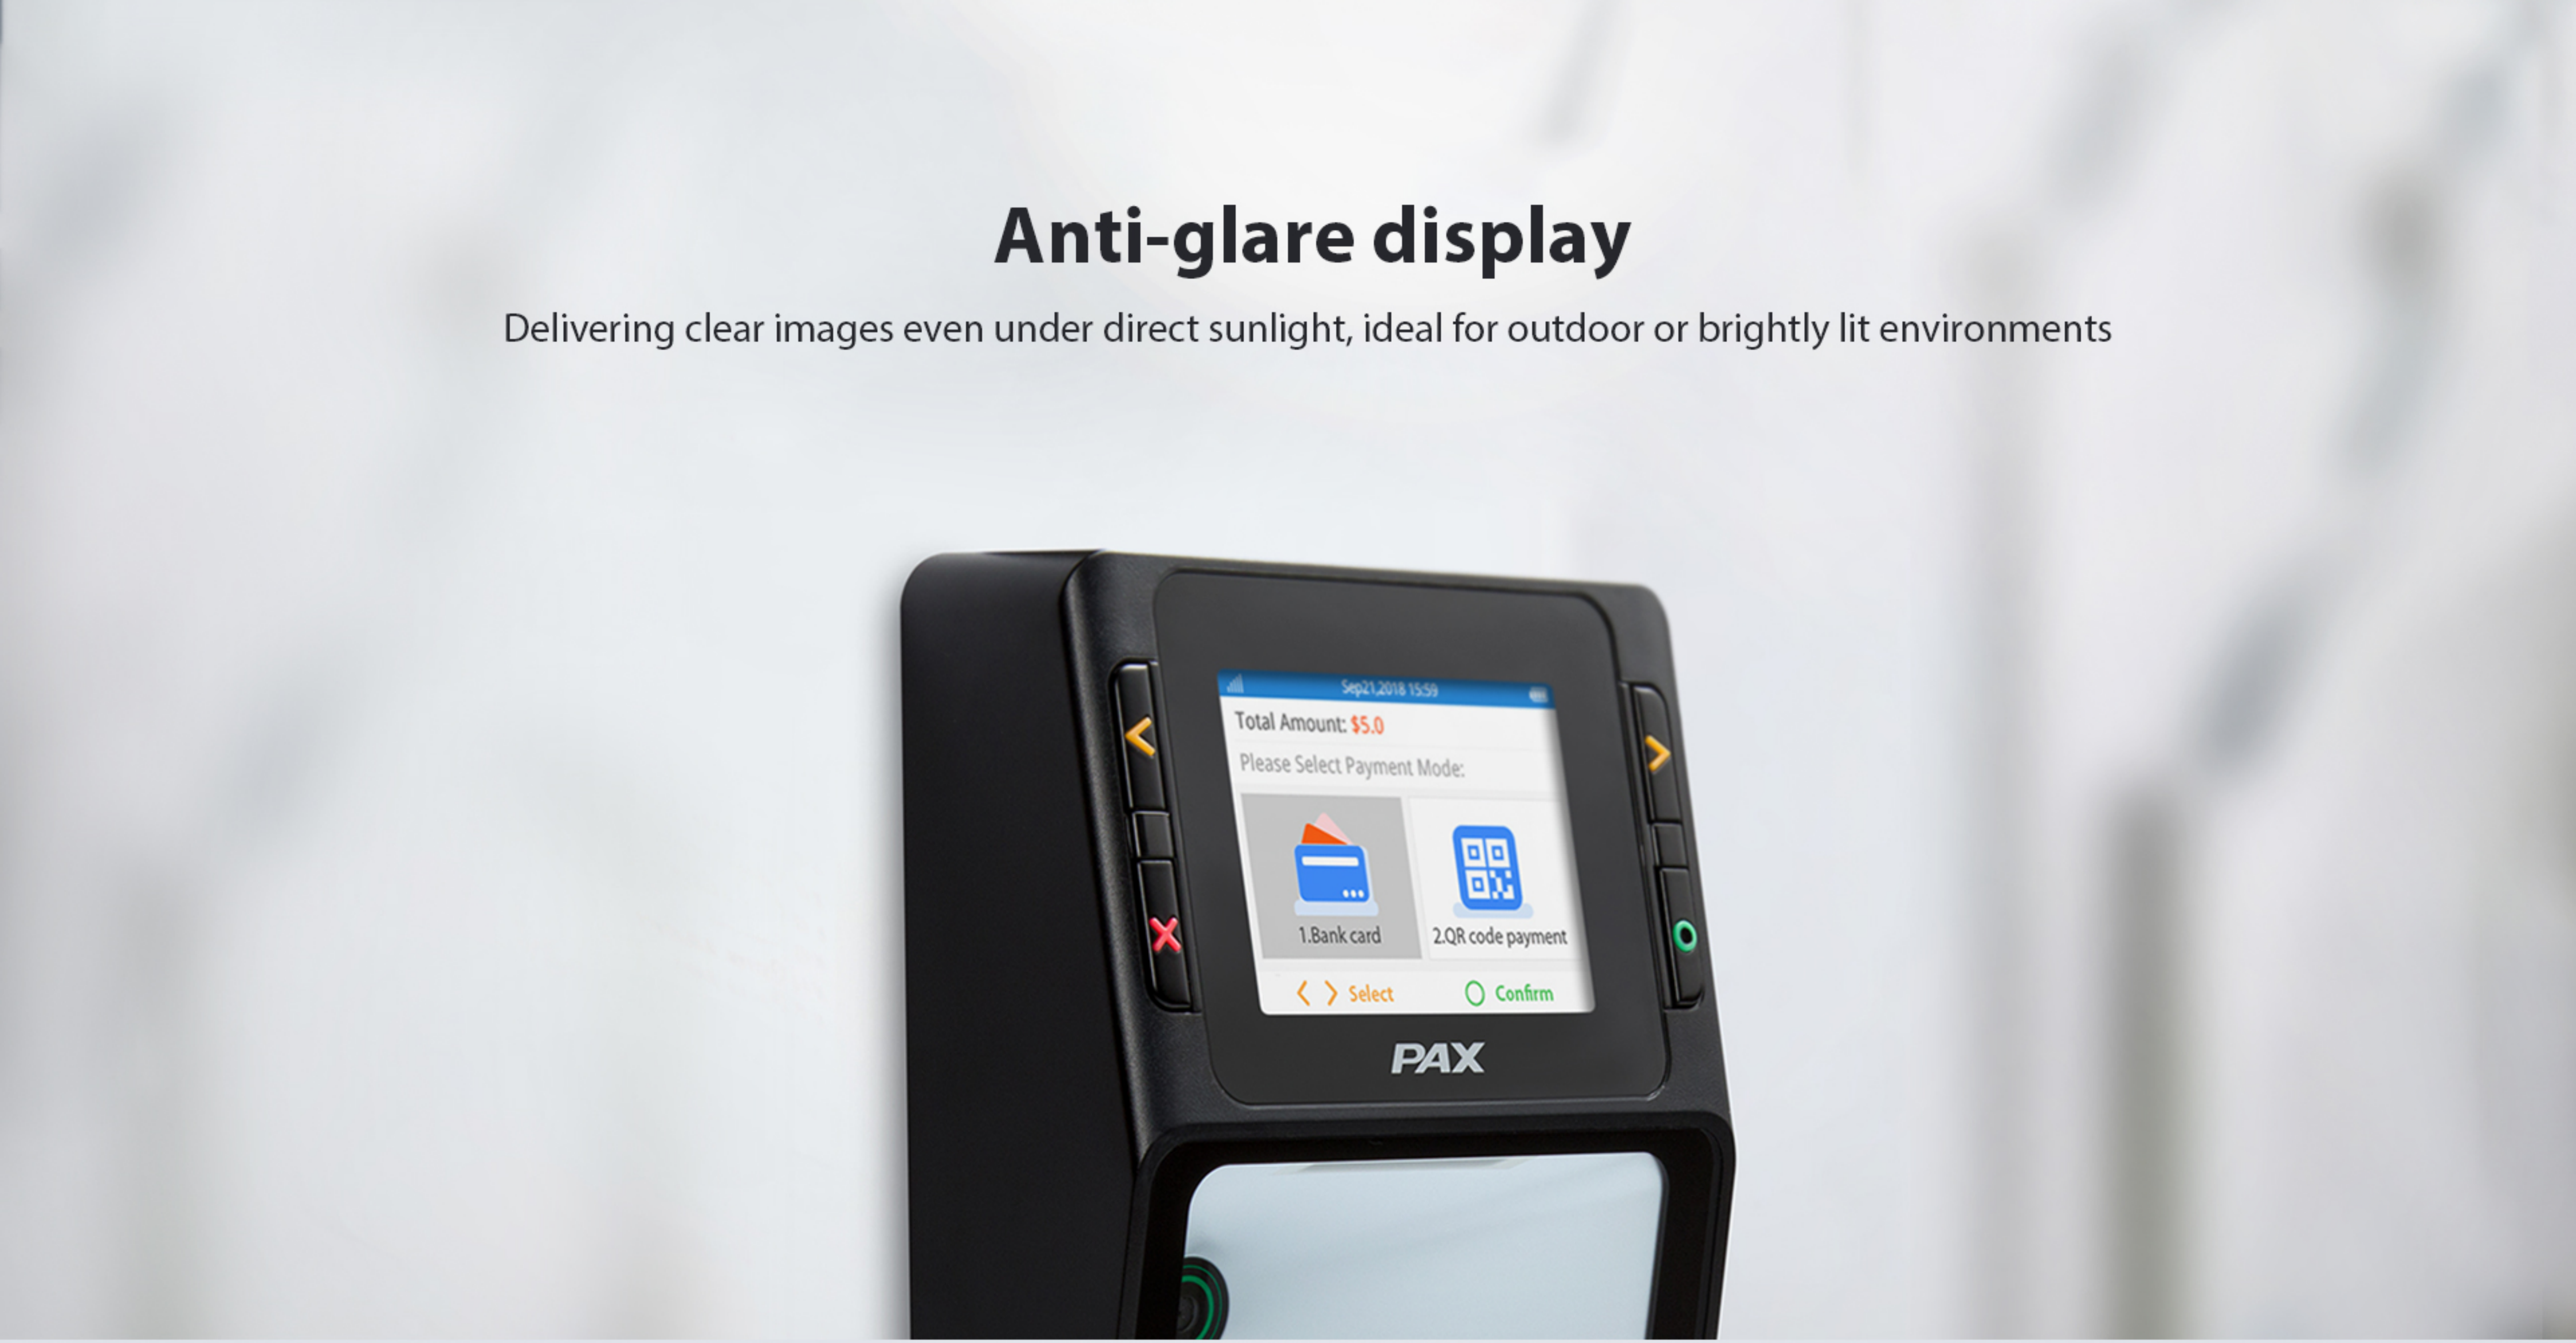

Anti-glare display

Delivering clear images even under direct sunlight, ideal for outdoor or brightly lit environments




Advanced connectivity

Integration with the optional CM20 box provides 4G, 3G, WiFi and Ethernet



IP56 / IK08

The ruggedized casing protects the display and camera from hard knocks, and makes the device resistant to water, wind, dust and dirt

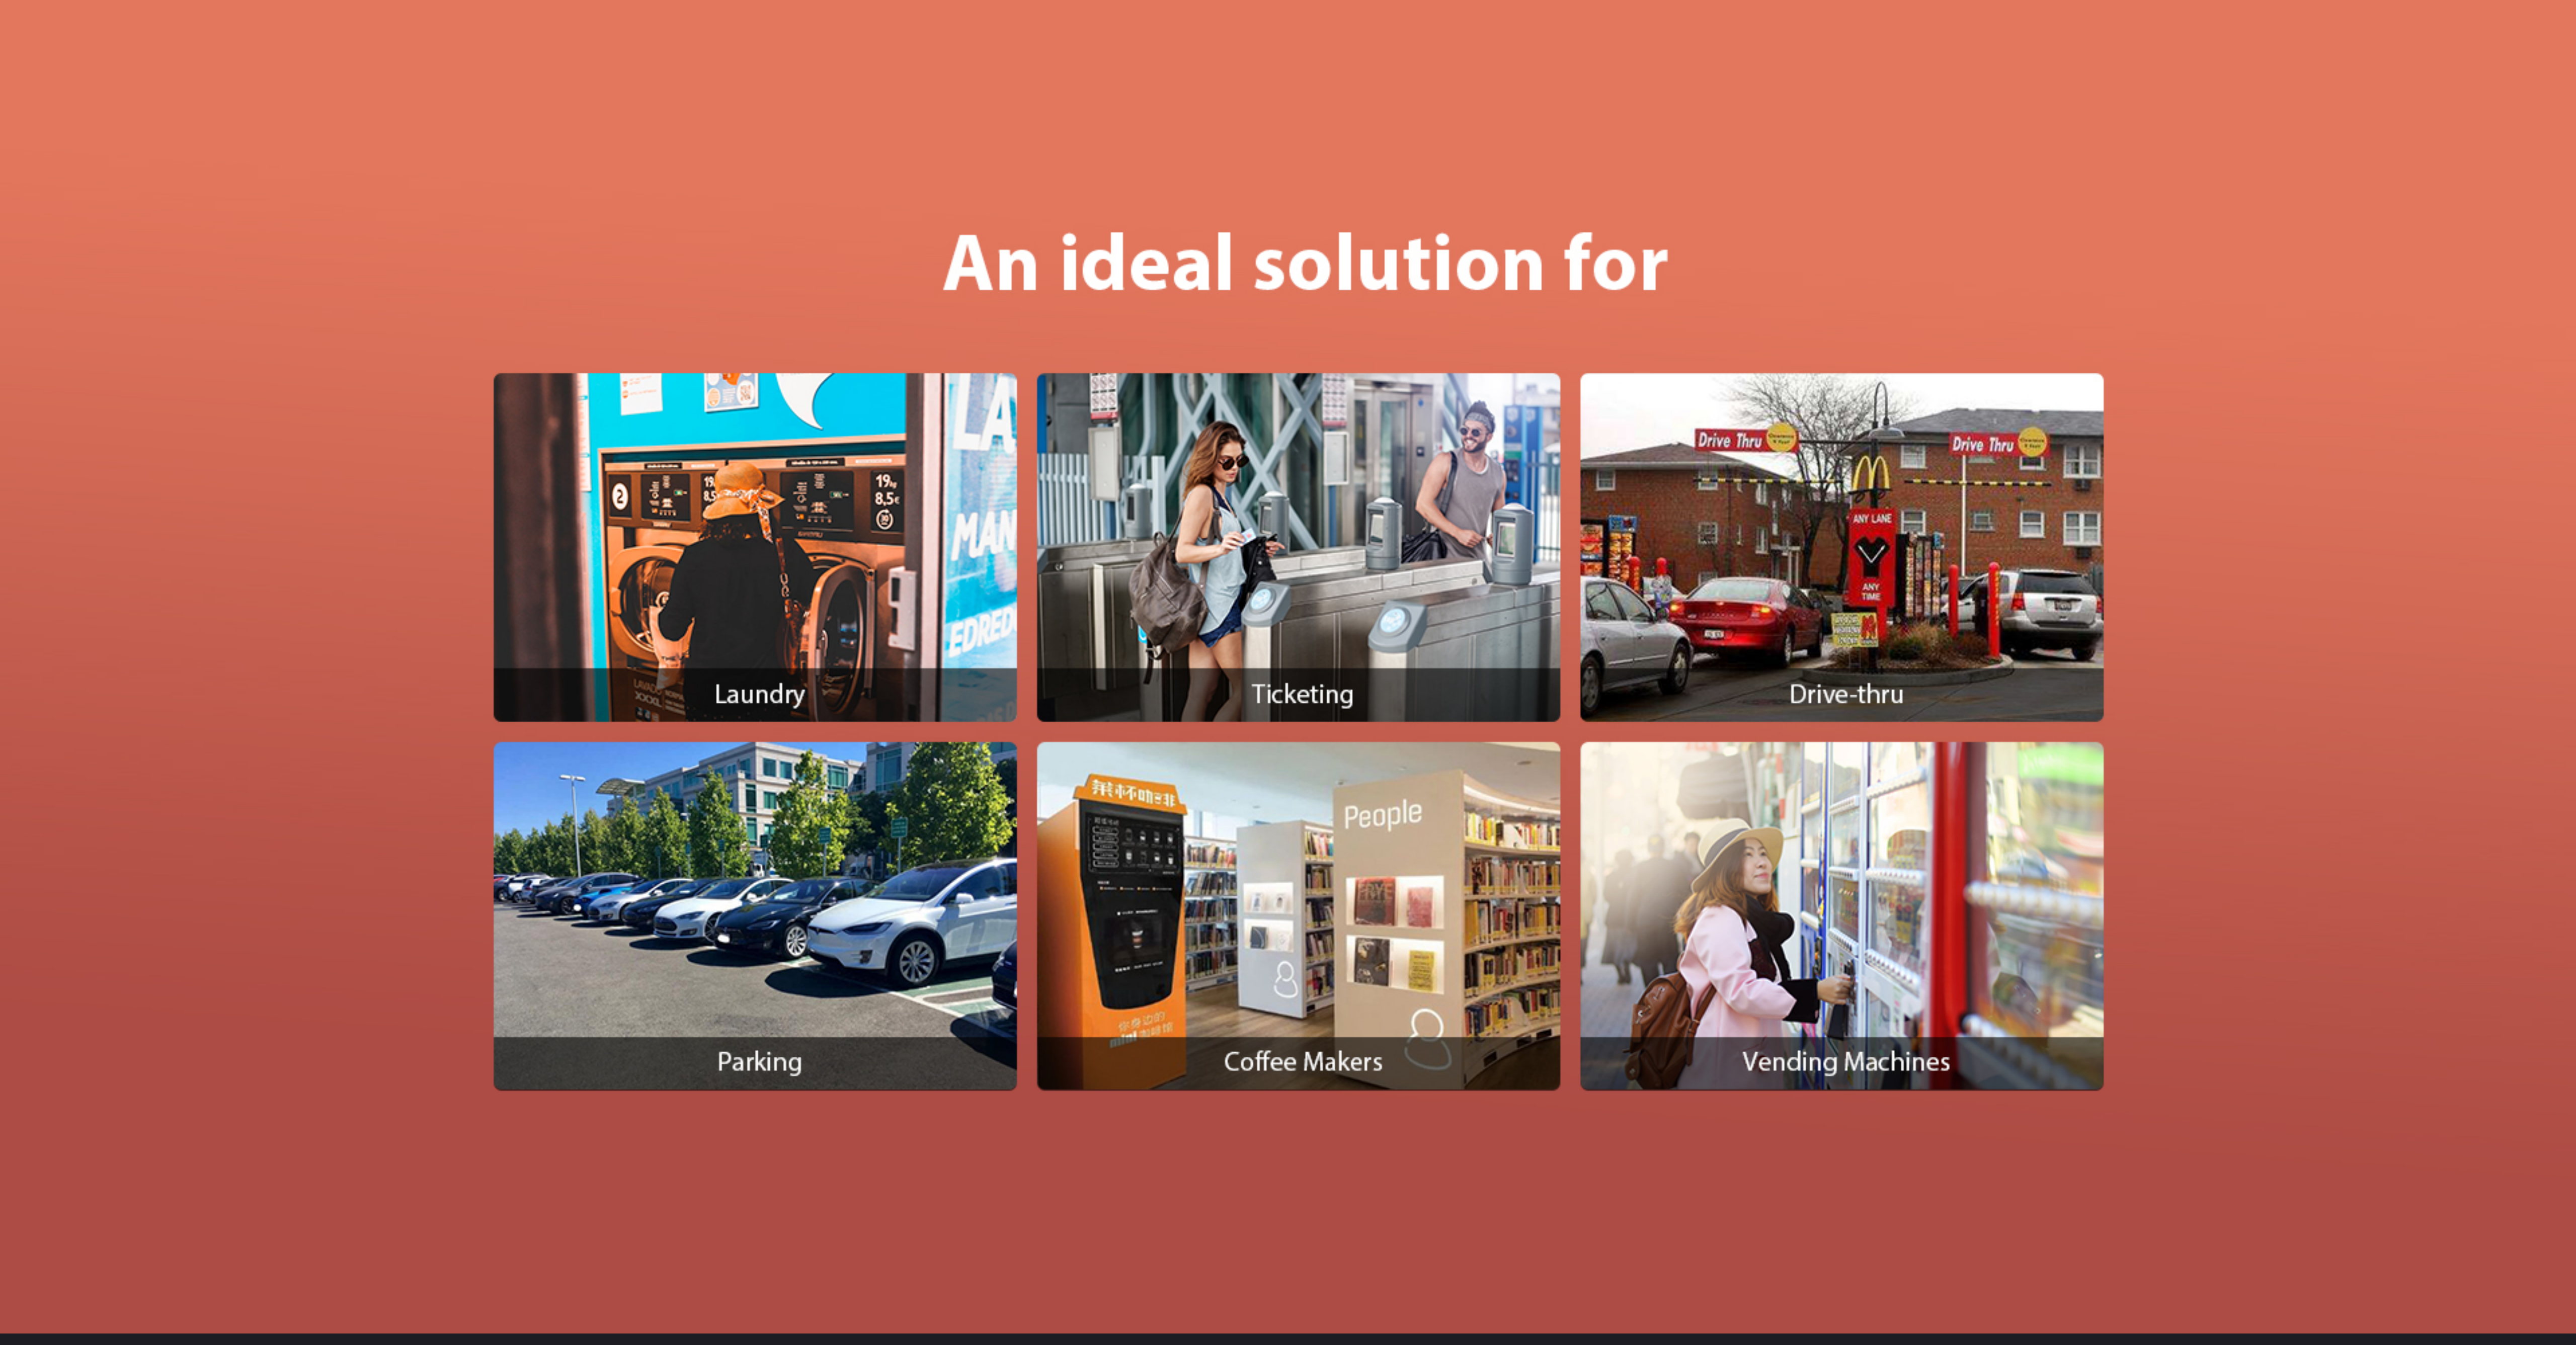

An ideal solution for

Technical Specifications

- | | | |
|---|---|--|
| <p>OS
Prolin</p> | <p>Processor
Cortex-A7</p> | <p>Memory
256MB DDR + 128MB Flash</p> |
| <p>Display
2.8 inches TFT Color Screen,
320 x 240 pixels,
Brightness > 550 nits,
Anti-fingerprint</p> | <p>QR Scanner
Reads 1D & 2D Codes</p> | <p>Card Readers
Contactless card reader
(ISO 14443 type A/B,
ISO 18092 NFC, JIS X 6319-4)</p> |
| <p>Communications
LAN Bluetooth v5.0 & Dual
Band WiFi (optional),
3G/4G (optional, connected with CM20)</p> | <p>Keys
4 x Functional Keys,
1 x Settlement Key (on reverse side),
1 x Maintenance Key (on reverse side)</p> | <p>Audio
1 x Speaker</p> |
| <p>Peripheral Ports
1 x USB Type A (USB host)
1 x USB Type B (USB slave)
1 x RJ45 (LAN)
1 x RJ45 (RS232/F-BOX)
1 x 6pin Connector (Digital I/Os)
1 x MDB slave/JVMA</p> | <p>Power
5V DC via USB Type B
12V DC - 42V DC via MDB
24V DC via JVMA</p> | <p>SAM Slots
2 x SAM</p> |
| <p>Certification
PCI PTS Sx, SRED, EMV Contactless L1,
ePBOC D1, iQICS L2,
MasterCard payPass L2, Visa payWave L2,
American Express ExpressPay L2,
Discover D-PAS L2, Interac_Flash L2,
J/Speedy L2, MasterCard TQM,
FCC, IC, UL, RoHS, CE, CSEC, UKCC,
Felica, VCCI</p> | <p>Environmental
-20°C ~ 70°C (4°F ~ 158°F)
Operating Temperature
-30°C ~ 70°C (22°F ~ 158°F)
Storage Temperature
5% ~ 95% Relative Humidity,
Non-condensing</p> | <p>Physical
W x H x D (mm): 110 x 145 x 84
Weight (g): 486</p> |